
ON A MISSION
FOR YOUR SAFETY
FALL PROTECTION SYSTEM FOR
FLAT AND SLOPING ROOFS
ROOF SAFETY SYSTEMS BV

RSS SLOPING ROOF

Fall protection for sloping roofs
Tested and certified according to EN 13374 - A1 2019 (class C)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

How it works

The original RSS Sloping Roof system can be set up realy fast. Hang the stanchions in the gutter and let them support on the facade. Then you attach the fence and the side plank. Is the complete safety system in place? Then everyone can go up safely.





Easy transport

Thanks to the transport frame, the system (30 meters) is easy to transport and store.

Transportframe - 500
110,0kg



Four parts

Stanchion -101-eu
10,5kg




Side plank - 103
3,0kg



Hook bracket - 104
1,5kg



Fence 3M - 102
11,5kg

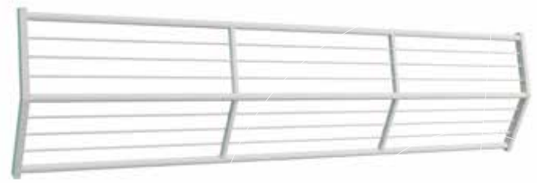

- No scaffolding required
- Quick, safe and easy installation on the roof
- Tested and certified
- Lightweight
- Stackable for transportation

ON A MISSION FOR YOUR SAFETY

RSS SLOPING ROOF

Fall protection for sloping roofs
Tested and certified according to EN 13374 - A1 2019 (class C)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV



RSS ATTIC CLAMP PRO

Fall protection for flat roofs
Tested and certified according to EN 13374 - A1 2019 (class A)


THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

How it works

The RSS Attic Clamp Pro is an innovative clamping system specially developed for roofs with raised edge and with open floor. The system which is Dekra certified to EN 13374:2019 Class A, provides safety and easy use when working at height!

Fixation on roof with upstand edge

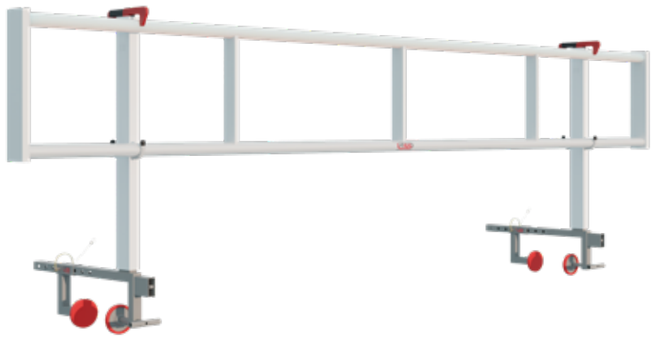


Fixation on roof with open floor



Two parts

Clamp Pro - 205
4,0kg

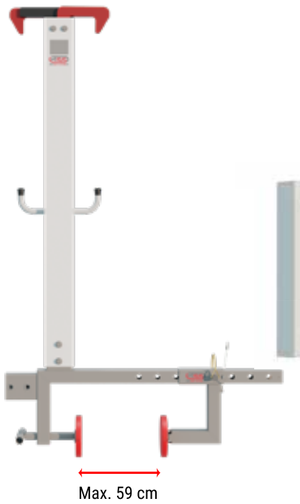

Fence 4M - 201
7,0kg




Easy transport

Thanks to the transport frame, the complete system (60 meters) with all accessories can be easily transported, hoisted and stored. The system can be stored in both positions in the transportframe.

Transportframe - 600
120kg



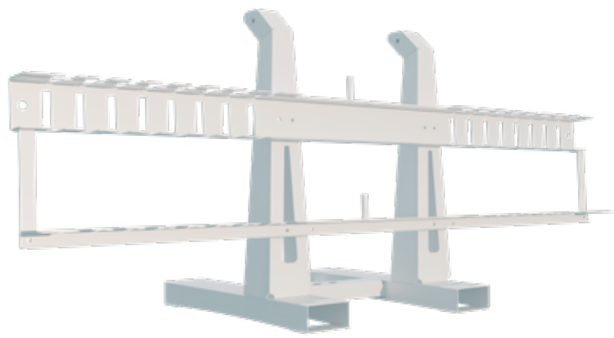

Optimal use work surface

Consists of only two parts

Tested and certified

Can be used for two types of flat roofs

Safely and quickly on the roof


ON A MISSION FOR YOUR SAFETY

RSS ATTIC CLAMP PRO

Fall protection for flat roofs
Tested and certified according to EN 13374 - A1 2019 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

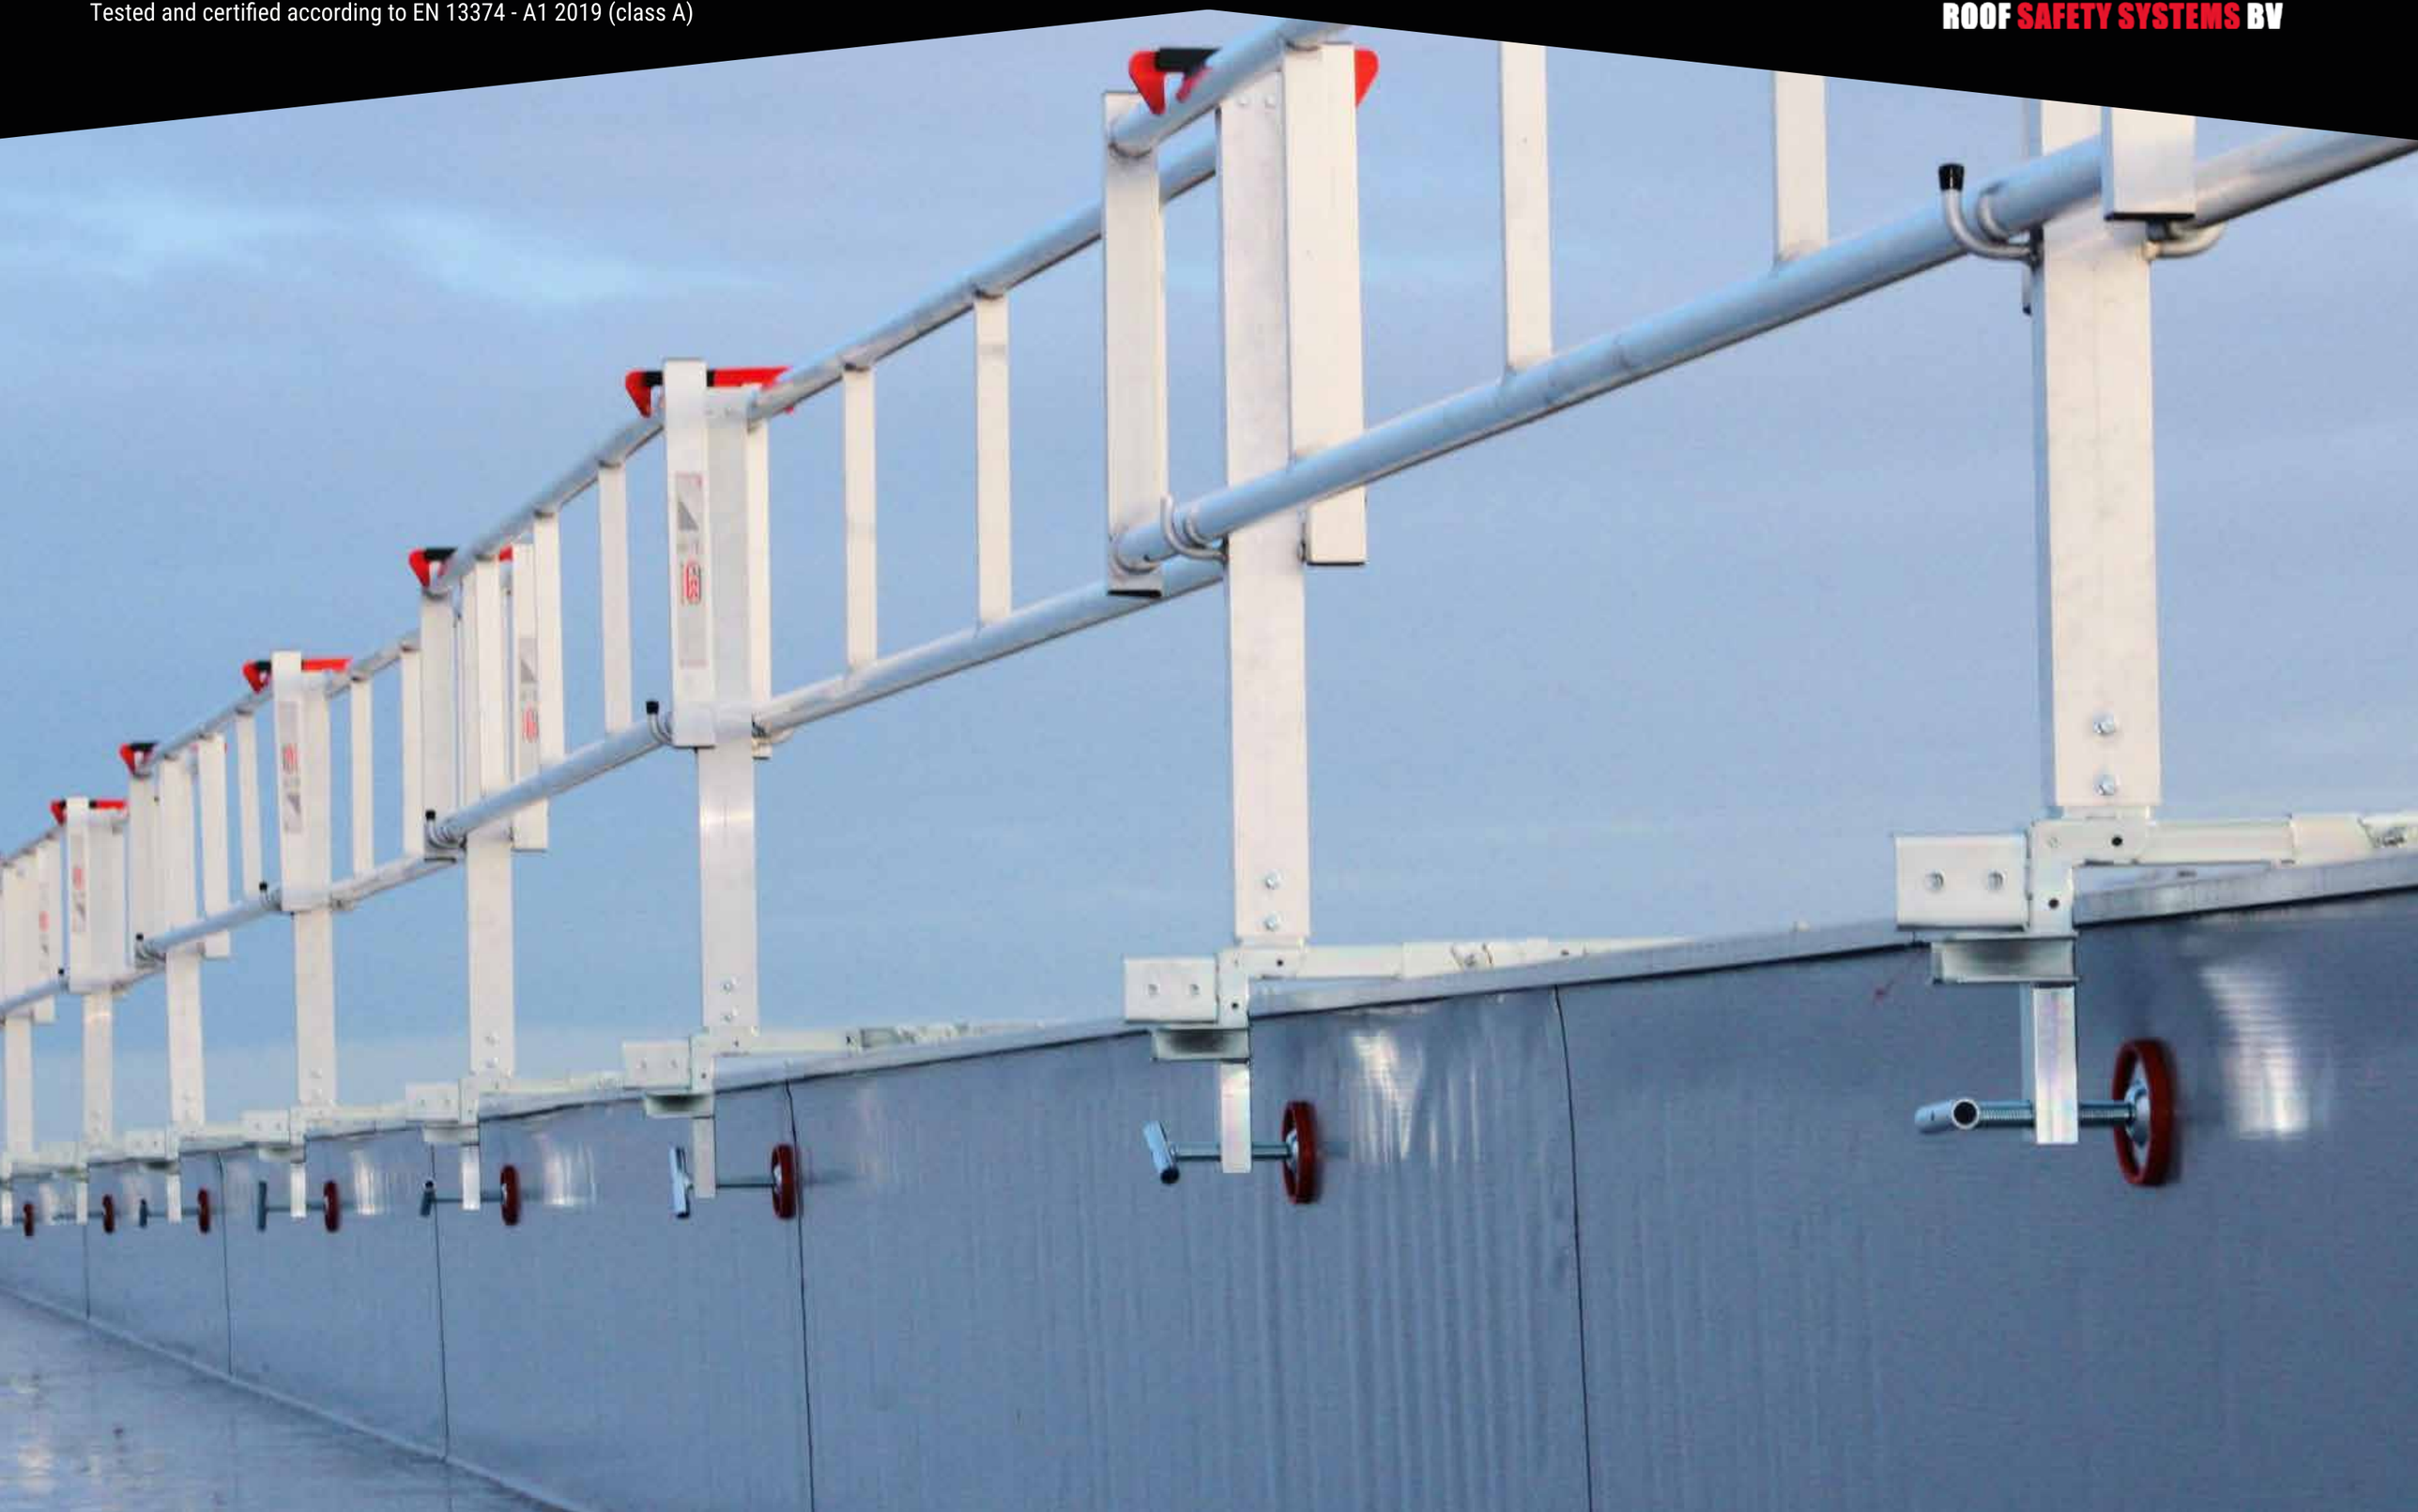

RSS FLAT ROOF COMPACT


Fall protection for flat roofs
Tested and certified according to EN 13374 - A1 2019 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

How it works

The flat roof compact system is particularly narrow (60 cm), which provides more additional space for the installation of solar cells. This system consists of just three components. Only the ballast blocks need to be used with this system. This makes it the most user-friendly system that can be installed by a single person.

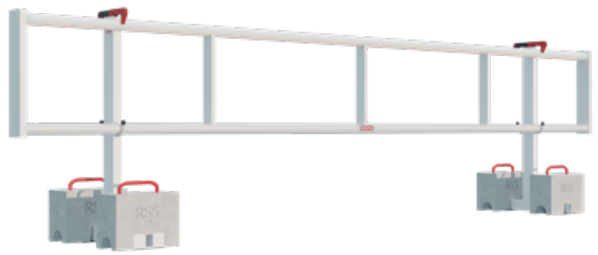

Three parts

Ballast block - 202-4
23,0-25,0kg



Fence 4M - 201
7,0kg

Stanchion - 204
7,0kg





Easy transport

Thanks to the transport frame, the system (40 meters) is easy to transport, hoist and store.

Transportframe - 400
120kg





Optimal use of working surface

Easy transportation

Tested and certified

Lightweight

Quick, safe and easy installation on the roof

ON A MISSION FOR YOUR SAFETY

RSS FLAT ROOF COMPACT

Fall protection for flat roofs
Tested and certified according to EN 13374 - A1 2019 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV



RSS ROOF SHELTER SLOPING ROOF

Fallprotection for sloping roofs
Tested and certified in accordance with EN1337:2013 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

How it works



When working at heights, it is important to make the entire workplace as safe as possible. This system gives fallprotection on the facade side for extra safety. It is the quickest and easiest system for safe access to a sloping roof. The fences can be coupled on each other by using the lockingpin.

Three parts


Ridgehook - 301
3,0kg



Fence 3M - 302
10,5kg




Roof bracket - 304
2,0kg



Easy transport

Thanks to the transport frame, the system (24 meters) is easy to transport and store.

Transportframe - 300
50,0kg

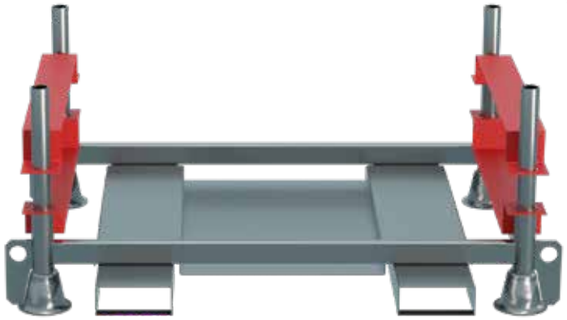



- Fall protection at the edge of the sloping roof
- Quick, safe and easy installation on the roof
- Tested and Certified
- Can be used for flat roofs and sloping roofs
- Optimal use on the roof


ON A MISSION FOR YOUR SAFETY

RSS ROOF SHELTER SLOPING ROOF

Fallprotection for sloping roofs
Tested and certified in accordance with EN1337:2013 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

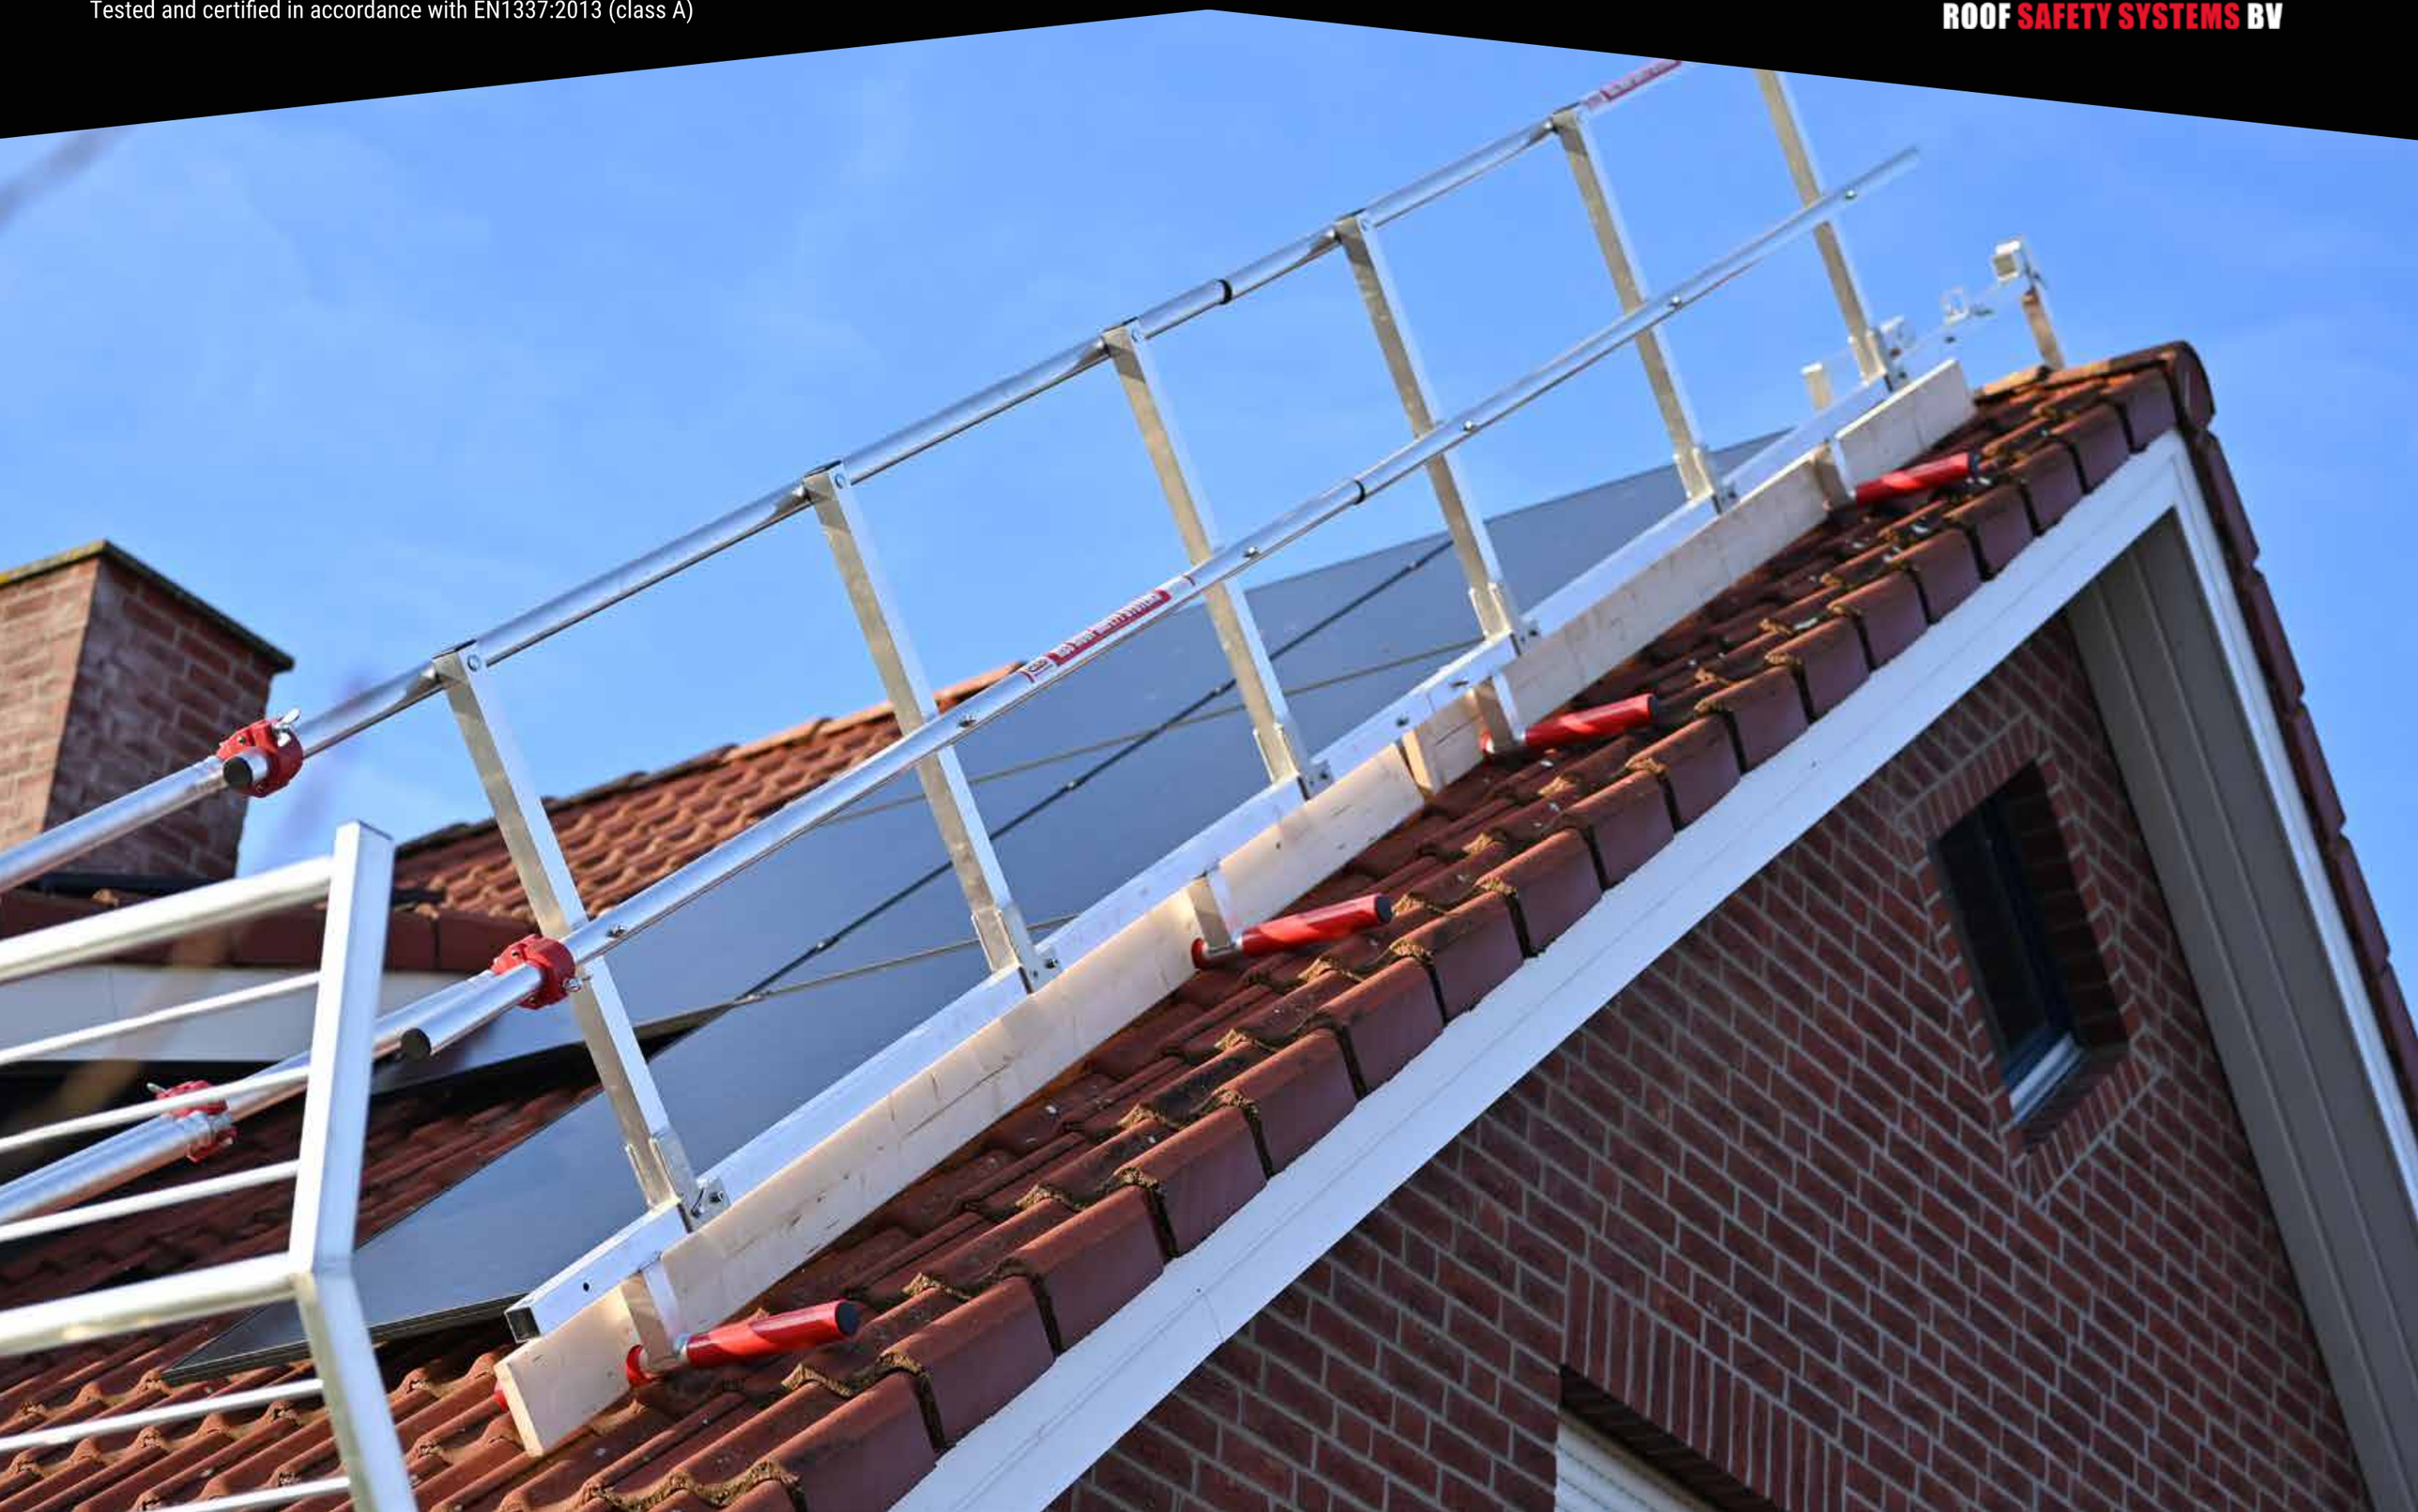

RSS ROOF SHELTER FLAT ROOF

Fallprotection for flat roofs
Tested and certified in accordance with EN1337:2013 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

How it works


This system in combination with the RSS Ballast blocks is designed to provide flat roofs with fall protection. This system is relatively narrow (66 cm), so there is enough working space for working or for an additional row of solar cells. The fences can be coupled on each other by using the lockingpin.



Easy transport

Thanks to the transport frame, the system (24 meters) is easy to transport and store.

Transportframe - 300
50,0kg

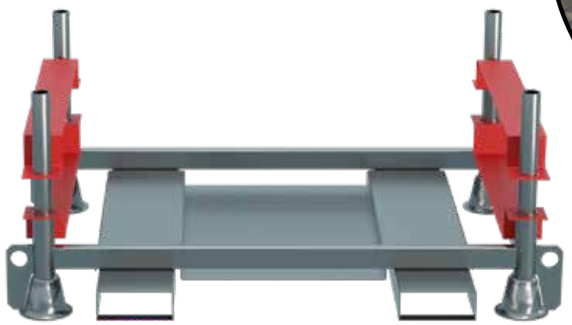



Two parts

Ballast block - 202-4
23,0-25,0kg



Fence 3M - 302
10,5kg



Quick, safe and easy installation on the roof

Tested and certified

Can be used for flat and sloping roofs

Optimal use of workspace

ON A MISSION FOR YOUR SAFETY

RSS ROOF SHELTER FLAT ROOF

Fallprotection for flat roofs
Tested and certified in accordance with EN1337:2013 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV



RSS FLAT ROOF CLASSIC


Fall protection for flat roofs
Tested and certified according to EN 13374 - 2019 (class A)

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

How it works

This system is suitable for flat roofs and is unique in its simplicity. The system consists of three parts and is very light thanks to the use of high-quality aluminum.

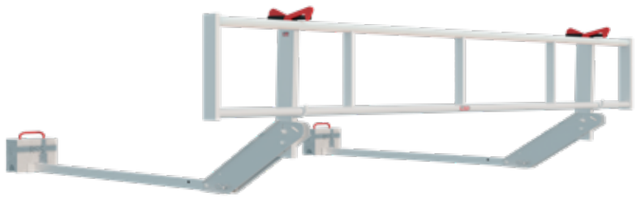

Quick, safe and easy installation on the roof

Tested and certified

Lightweight

Foldable

Three parts

Ballast block - 202-4
23,0-25,0kg




Fence 4M - 201
7,0kg



Stanchion - 200
6,0kg



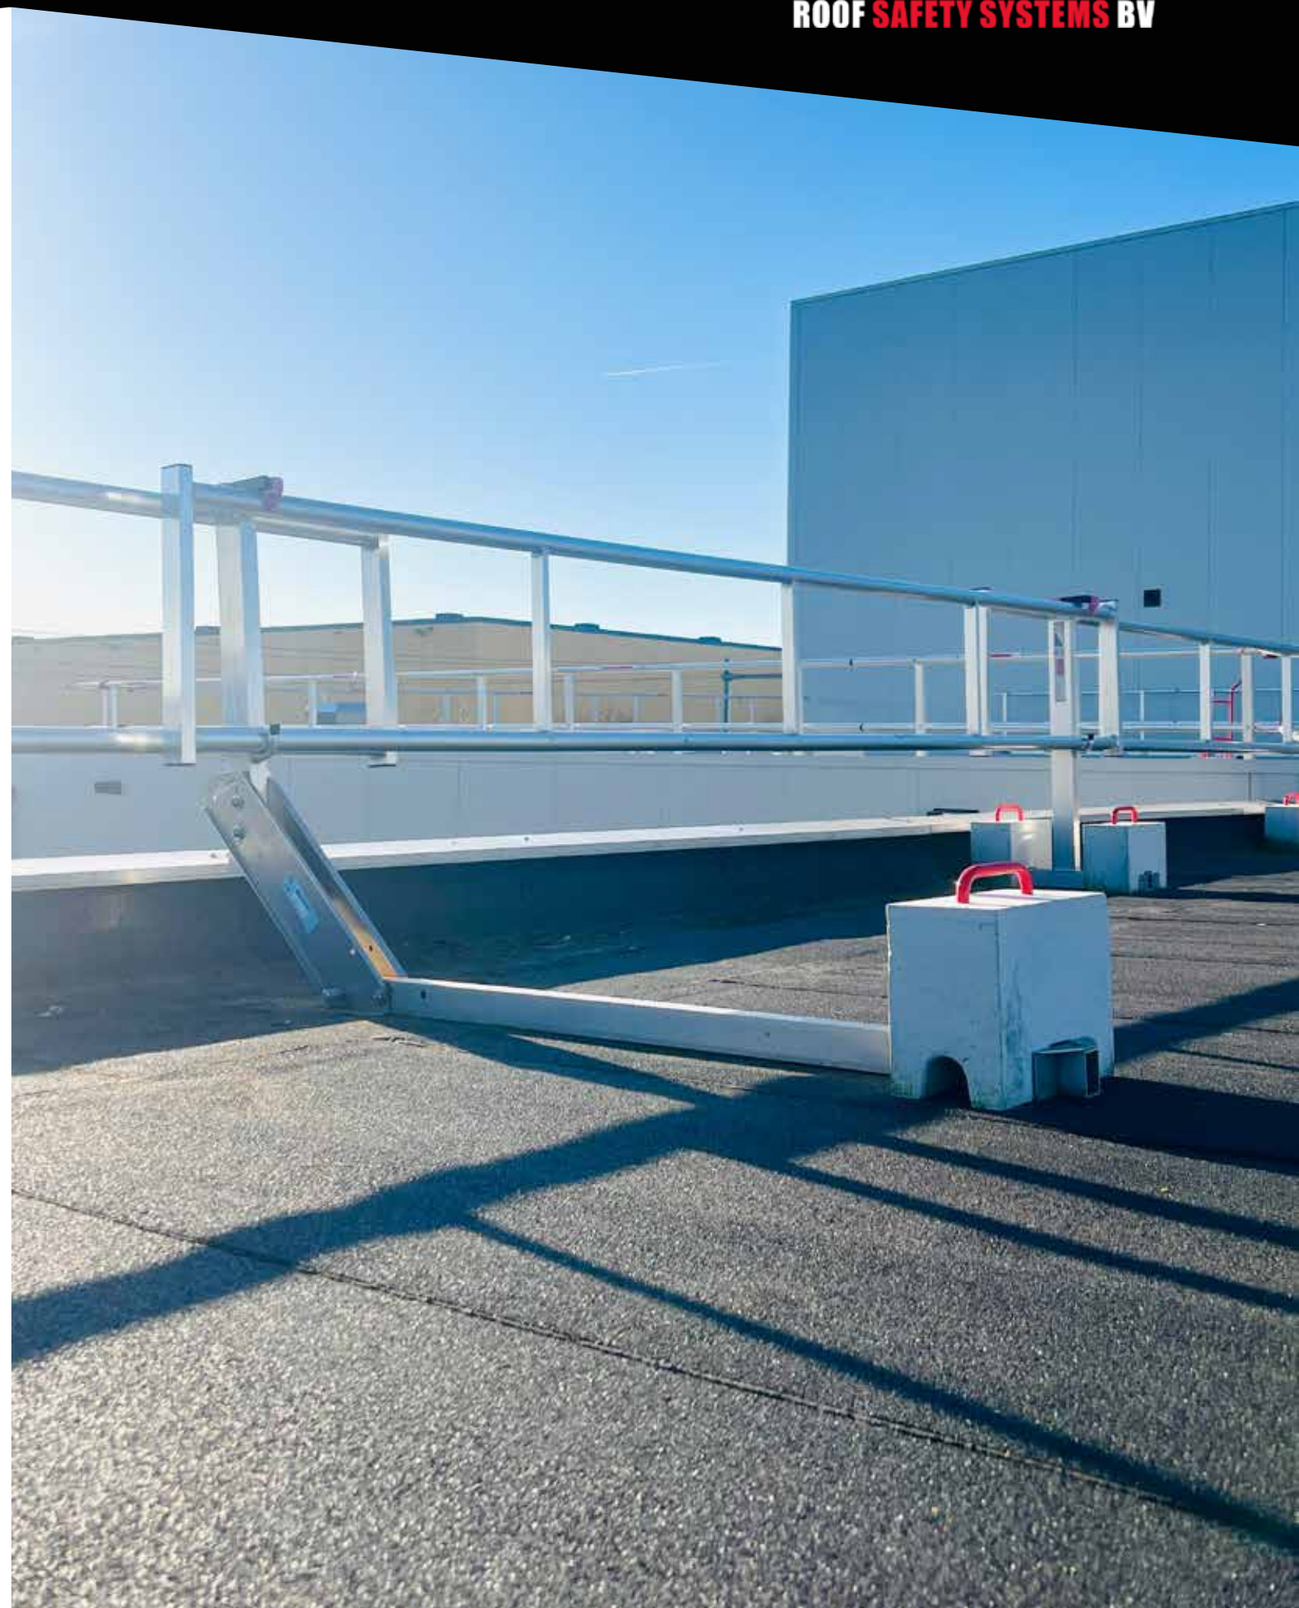

ACCESSOIRES

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

S215 - Heavyduty handtruck




With this practical tool, you can move the RSS ballast blocks easily across the roof. You can transport up to three blocks at once, saving time and making your work more efficient.

105 - Base plate




The base plate is required if the gutter is made of plastic or aluminum or you doubt if the gutter is not strong enough. The RSS Sloping Roof can be installed on roofs without a gutter along with the Baseplate.

S268 - System connector

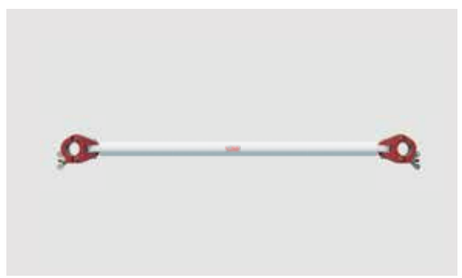


This product is ideal for all types of RSS systems. It is perfect for filling open areas in roof edge protection and for connecting different RSS system.

S241 - Windprotection

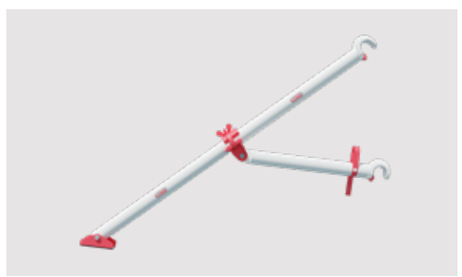


Specially designed to provide our Sloping Roof system with extra stability in strong winds. You place this Windprotection between the roof and the system.


S278 - 2M fence

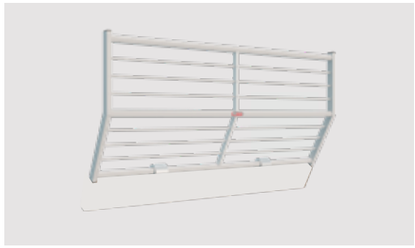


303 - 2M fence

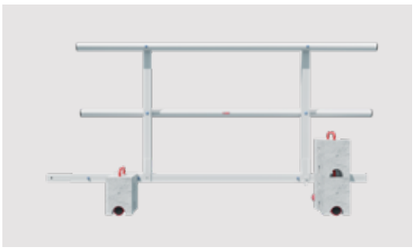

300 - Transportframe RSS Roof Shelter

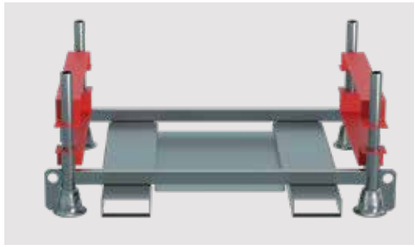

206 - 2M fence

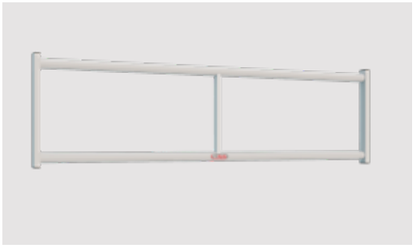


400 - Transportframe RSS Flat Roof Compact



500 - Transportframe RSS Sloping Roof



600 - Transportframe RSS Attic Clamp Pro

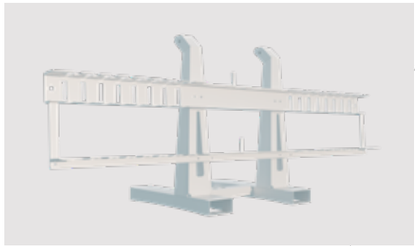

S611 - RSS Pressuredivider



ON A MISSION
FOR YOUR SAFETY

NOTES:

THE ORIGINAL
FALL PROTECTION SYSTEM

ROOF SAFETY SYSTEMS BV

TESTED AND CERTIFIED
ROOF SAFETY SYSTEMS

OUR PRODUCTS ARE TESTED AND CERTIFIED



ON A MISSION FOR YOUR SAFETY

ROOF SAFETY SYSTEMS BV

X

Stick your business card or logo sticker here